EXPO SINGLE B



Tool-carrier with hydraulic widening

Available in version with front or rear three-point couplings

On demand: power take-off high (for rubber-tyred tractors), low (for crawler tractors) or with pump directly connected to the tractor power take-off (for rubber-tyred and crawler tractors)

Kit including multiplier single pump, hoses, filter, tank and oil

Single heat exchanger with double thermostat

Electronic control unit with general alarm


55 cm RH side inter-row blade with single channel joystick for manual emergency blade return

Bulldozer-like tilling spur

RH and LH toothed wheels for depth adjustment and side stability control (each)

40 cm RH lateral hydraulic widening with 2 quick tractor couplings 40 cm

Model	CODE	The	←		###	- nd a VMAX	Kg.
Expo singolo B 1S	1259	40 - 60	30	95 / 125	20	150 min	340
Expo singolo B 1	1028	40 - 60	40	110 / 150	20	170 min	365
Expo singolo B 2	0772	40 - 60	40	130 / 170	20	200 min	385

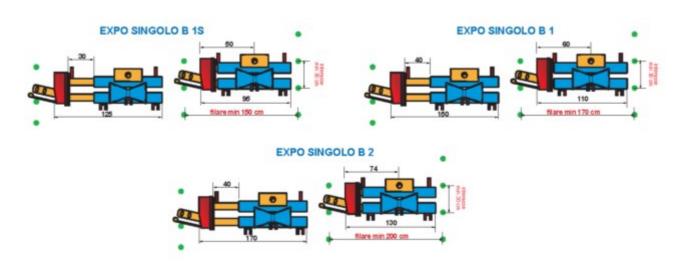

Optional

- CODE 1287 Flow diverter system to control 2 double effect cylinders SEPARATELY with only 2 quick tractor couplings
- CODE 1158 Button for immediate RH rotary brush / mower head wire rotation stop (applicable only during the order)
- CODE 1052 RH button for feeler pin deactivation to work with the utensil in the tall grass, to avoid that the feeler pin goes back in when is not necessary (applicable only during the order)
- CODE 1147 RH hydraulic wheel adjustment with 2 quick tractor couplings
- CODE 1171 Extra charge lateral extension for Expo singolo models B, R ECO, R TOP: RH cm 60 (total amount space + 7 cm on LH) RH cm 80 (total amount space + 27 cm on LH)
- CODE 0698 RH hydraulic inter-row inclination with 2 quick tractor couplings. Dimension cm 6,5
- CODE 0982 Blade with clod breaker, fin and feeler pin cm 45 (additionally at the standard blade)
- CODE 0695 Blade with clod breaker, fin and feeler pin cm 65 (additionally to standard blade)
- CODE 1407 RH blade with clod breaker foreshortned fin and feeler pin cm 45 for limited inter-row work (to apply with RH fender with delimiter disc CODE 1405)
- CODE 1160 RH non-stop feeler pin holder

- CODE 1085 - RH oscillating feeler pin holder adjustable in height - CODE 1046 - RH adjustable fender for the earth [cannot be used at the same time as the RH lifter plough kit (code 0702) or LH lifter plough kit (code 0725)] - CODE 1409 - RH shock absorber for ground cover CODE 1046 recommended on tool carrier in reversible and front version - CODE 1405 - RH fender with adjustable delimiter disc for limited inter-row work [to be used at the same time as RH circular cutter diam. 250 (code 1403) and/or RH cm 45 inter-row blade with foreshortened lifter plough kit (code 1407)] - CODE 1050 - RH stump cleaner for inter-row kit (applicable simultaneously at following inter-row tools: inter-row blade, plant lifting ploughshare, circular cutter, rotary plant lifter and traction disk set) - CODE 0483 - RH sled for terrain with stones or superficial roots - CODE 1187 - RH 45 cm inter-row plant lifting ploughshare - CODE 1268 - RH 55 cm inter-row plant lifting ploughshare - CODE 0702 - RH plant lifting plough kit with front depth directional wheel [cannot be used at the same time as the adjustable RH/LH ground cover cod. 1046/1047] - CODE 1266 - Universal no traction adjustable rounded tiller disc - CODE 0488 - RH no traction bulldozer-disk diam. 320 - CODE 1264 - Universal no traction adjustable ridger bit disc - CODE 1312 - Universal no traction adjustable serrated ridger 2-discs complete with cleaner on first disk - CODE 1341 - Kit hydraulic system for work with rotary brush, mower head, mini chopper head and rotary mower head when RH NON STOP PATENTED VALVE is not apply (only when ordering - necessary hydraulic system) - CODE 1247 - RH vertical wires mower with adapter for Expo versions and wheel with mechanical adjustment for depth adjustment (without patented valves requires application CODE 1341) - CODE 0718 - RH traction mini-shredder head (without patented valves requires application CODE 1341) - CODE 0720 - RH traction mower head with blades or strings diam. 500 (without patented valves requires application CODE 1341) - CODE 1150 - RH hydraulic rotary brush with gear motor and oscillating adapter (without patented valves requires application CODE 1341)