EXPO SINGLE R ECO



Tool-carrier with hydraulic widening

Available in version with front or rear three-point couplings

On demand: power take-off high (for rubber-tyred tractors), low (for crawler tractors) or with pump directly connected to the tractor power take-off (for rubber-tyred and crawler tractors)

Hydraulic predisposition for the application of traction utensils with PATENTED NON-STOP VALVE

Kit including multiplier single pump, hoses, filters, tank and oil

Single heat exchanger with double thermostat

2-channel electronic control unit with general alarm

55 cm RH side inter-row blade with single channel joystick for manual emergency blade return


Bulldozer-like tilling spur

RH and LH toothed wheels for depth adjustment and side stability control

40 cm RH lateral hydraulic widening with 2 quick tractor couplings

Hydraulic RH tool inclination with 2 quick tractor couplings

Model	CODE	75	←		###	Grantes G	Kg.
Expo singolo R ECO 1S	1366	40 - 60	30	102 / 132	20	160 min	370
Expo singolo R ECO 1	1029	40 - 60	40	115 / 155	20	180 min	395
Expo singolo R ECO 2	0773	40 - 60	40	137 / 177	20	210 min	415

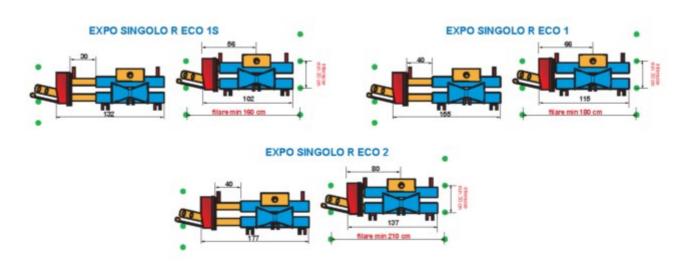

Optional

- CODE 1287 Flow diverter system to control 2 double effect cylinders SEPARATELY with only 2 quick tractor couplings
- CODE 1158 Button for immediate RH rotary brush / mower head wire rotation stop (applicable only during the order)
- CODE 1052 RH button for feeler pin deactivation to work with the utensil in the tall grass, to avoid that the feeler pin goes back in when is not necessary (applicable only during the order)
- CODE 1147 RH hydraulic wheel adjustment with 2 quick tractor couplings
- CODE 1171 Extra charge lateral extension for Expo singolo models B, R ECO, R TOP: RH cm 60 (total amount space + 7 cm on LH) RH cm 80 (total amount space + 27 cm on LH)
- CODE 0982 Blade with clod breaker, fin and feeler pin cm 45 (additionally at the standard blade)
- CODE 0695 Blade with clod breaker, fin and feeler pin cm 65 (additionally to standard blade)
- CODE 1407 RH blade with clod breaker foreshortned fin and feeler pin cm 45 for limited inter-row work (to apply with RH fender with delimiter disc CODE 1405)
- CODE 1160 RH non-stop feeler pin holder
- CODE 1085 RH oscillating feeler pin holder adjustable in height



- CODE 1093 - RH kit to transform the cutter in rotary plant lifter diam. 500 to 4 fins
- CODE 1149 - RH kit to transform the cutter in rotary plant lifter diam. 400 to 4 fins
- CODE 1095 - RH kit to transform the rotary plant lifter in cutter diam. 500 to 4 hoes
- CODE 1094 - RH kit to transform the rotary plant lifter in cutter diam. 400 to 3 hoes
- CODE 1289 - RH traction 2-lifting disc 36 cm diam.
- CODE 0717 - RH traction disk set with 3 plant lifting disks diam. 36 cm

Print this page