

P20-CB/P20-CE TECHNICAL DATA SHEET (hydraulic piston pump for airless painting)

Weight: 87 Kg



Photos don't show standard machine.

| MODEL | P20-CB | P20-CE |
|---------------|-----------------|----------------------|
| MAX VOL. FLOW | 6,17 l/min | 6,17 l/min |
| MAX PRESSURE | 250 bar | 250 bar |
| ENGINE/MOTOR | 6 HP - gasoline | 3 HP - electric |
| MOTOR OUTPUT | | 230 V – SINGLE PHASE |
| COUPLING | belt | belt |
| ENGINE-PUMP | | |

SPRAYABLE PRODUCTS:

acrylic paints, synthetic resin lacquers, 2K materials, emulsions, latex paints, release agents, priming varnishes and primers, fillers, road marking paints waterborne or solvent-based.

Attention: always verify that **materials** used are specifically **for airless application**

AREAS OF APPLICATION:

BUILDING & CONSTRUCTION:
painting, proofing

WOOD & METAL TREATMENT:
structural steelworks,
carpentries


DOCKYARD: shipbuilding, big tanks

ROAD MARKING



ACCESSORIES:

- High pressure filter with manometer
- Suction system: suction hose with mini filter
- Kit for direct suction
- Cock and return hose
- High pressure hose ¼" | = 10 m
- Manual gun with 60 mesh filter (without nozzle and nozzle holder)
- Extension for manual gun
- Holder 11/16" for reversible nozzle
- Reversible nozzle

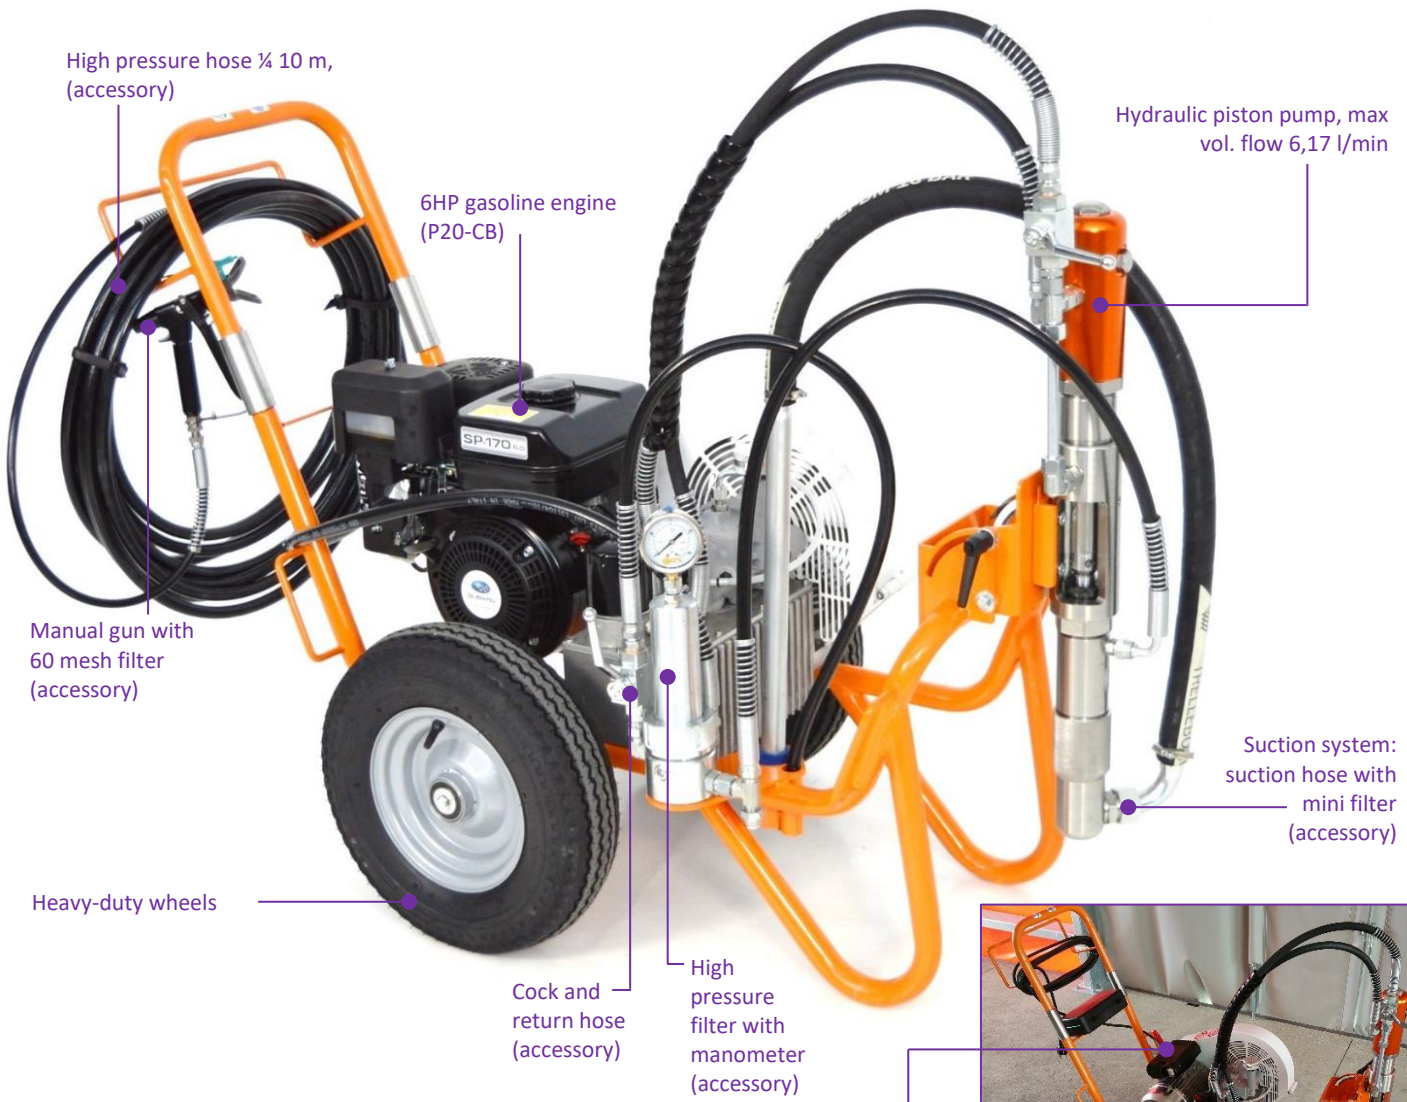

High pressure hose ¼ 10 m, (accessory)

6HP gasoline engine (P20-CB)

Hydraulic piston pump, max vol. flow 6,17 l/min

Manual gun with 60 mesh filter (accessory)

Suction system: suction hose with mini filter (accessory)

Heavy-duty wheels

Cock and return hose (accessory)

High pressure filter with manometer (accessory)



Folding handlebar to save space

3HP electric motor (P20-CE)



Parking brake

Suction system: direct from bucket, for paints with higher viscosity (accessory)

