

# L150 TECHNICAL DATA SHEET (airspray road marking machine)

Dimensions: 220x90x h without sunshade roof 185 cm; Weight: 825 Kg



Photo doesn't show standard machine.

## Gasoline engine:

-power 27 HP

## Lights and turning light

## Hydraulic drive with:

- 2 motors directly coupled on rear wheels  
-control for forward, reverse and neutral gear  
-variable-flow pump

## Steering on front wheels

Steering diameter 6,7 m

Seat with adjustable position (left/right; forward/back)

Sunshade roof

Machine is equipped with all safety devices according to EU requirements.

Machine conforms to:

- EU Directive 2006/42/EC on Machinery
- EU Directive 14/68/EU for Pressure Equipment (PED directive)

## Pressurized paint tank:

-capacity 150 l  
-made of stainless steel  
-with manual stirrer and cover totally removable for easier and quicker cleaning

Solvent tank for flushing of gun and paint hose

Pressurized glass bead tank, capacity 35 l. With regulator of pressure and moisture separator

## Compressor:

-flow air rate 1000 l/min

Automatic paint gun with line limiter (shroud), mounted on fixed support with gun height adjustable. (Fixed support can be replaced with pneumatic support or with marking discs. Look at optional). Standard nozzle for 10-20 cm line

Automatic glass bead gun. Diffuser with adjustable slope and adjustable opening angles. Closing delay regulator for bead gun

MAX. LINE WIDTH: 50 cm

(achievable only with proper optional equipment)

## Electronic spacing device C8000:

- 8 programs storable  
- control: upto 3 guns with only one program  
- alarm when speed is outside the range of minimum/maximum speed set  
- data recorded for each gun: total solid line metres  
- total data recorded for machine: total driven Km




**SPRAYABLE PRODUCTS:** refractive paints, not refractive paints, special paints with antiskid


## OPTIONAL EQUIPMENT:

- **Warning board** with arrow for left/right car overtaking and 2 flashing
- **Trailer for cones** with seat for operator (**SUGGESTED OPTIONAL**)
- **Second automatic paint gun with independent control** to stripe 50 cm or 2 lines at the same time (for example continuous line + skip line) (**SUGGESTED OPTIONAL**)
- **Pneumatic support for paint gun (one disc)**, to keep automatic gun always at the same distance from ground, ensuring constant width of the line (**SUGGESTED OPTIONAL**)
- **Marking discs**, to get a perfect definition of line edges. Useful particularly for concrete surfaces. Available in following widths:
  - marking discs for 10-20 cm line
  - marking discs for 10-30 cm line
  - marking discs for 50 cm line. Attention: 50 cm marking discs can be used only if striper is equipped with optional second automatic paint gun
- **Manual paint gun-short with 7 m air hose and 7 m paint hose**, for stenciling
- **Manual paint gun - long (with extension 40 cm) with 7 m air hose and 7 m paint hose**, for stenciling without bending and standing farther from paint spray
- **Supplementary 35 l pressurized tank for glass beads**. It's possible mounting till a total of 3 glass bead tanks
- **Second automatic glass bead gun with independent delay regulator** (**SUGGESTED OPTIONAL**)
- **Manual glass bead gun with air hose and bead hose**, for bead application on stenciling
- **Supplementary pressurized tank for paint**. Available capacities: - **pressurized paint tank capacity 15,5 l**  
- **pressurized paint tank capacity 26 l**
- **26 l pressurized tank and side extension bracket for pre-marking**.



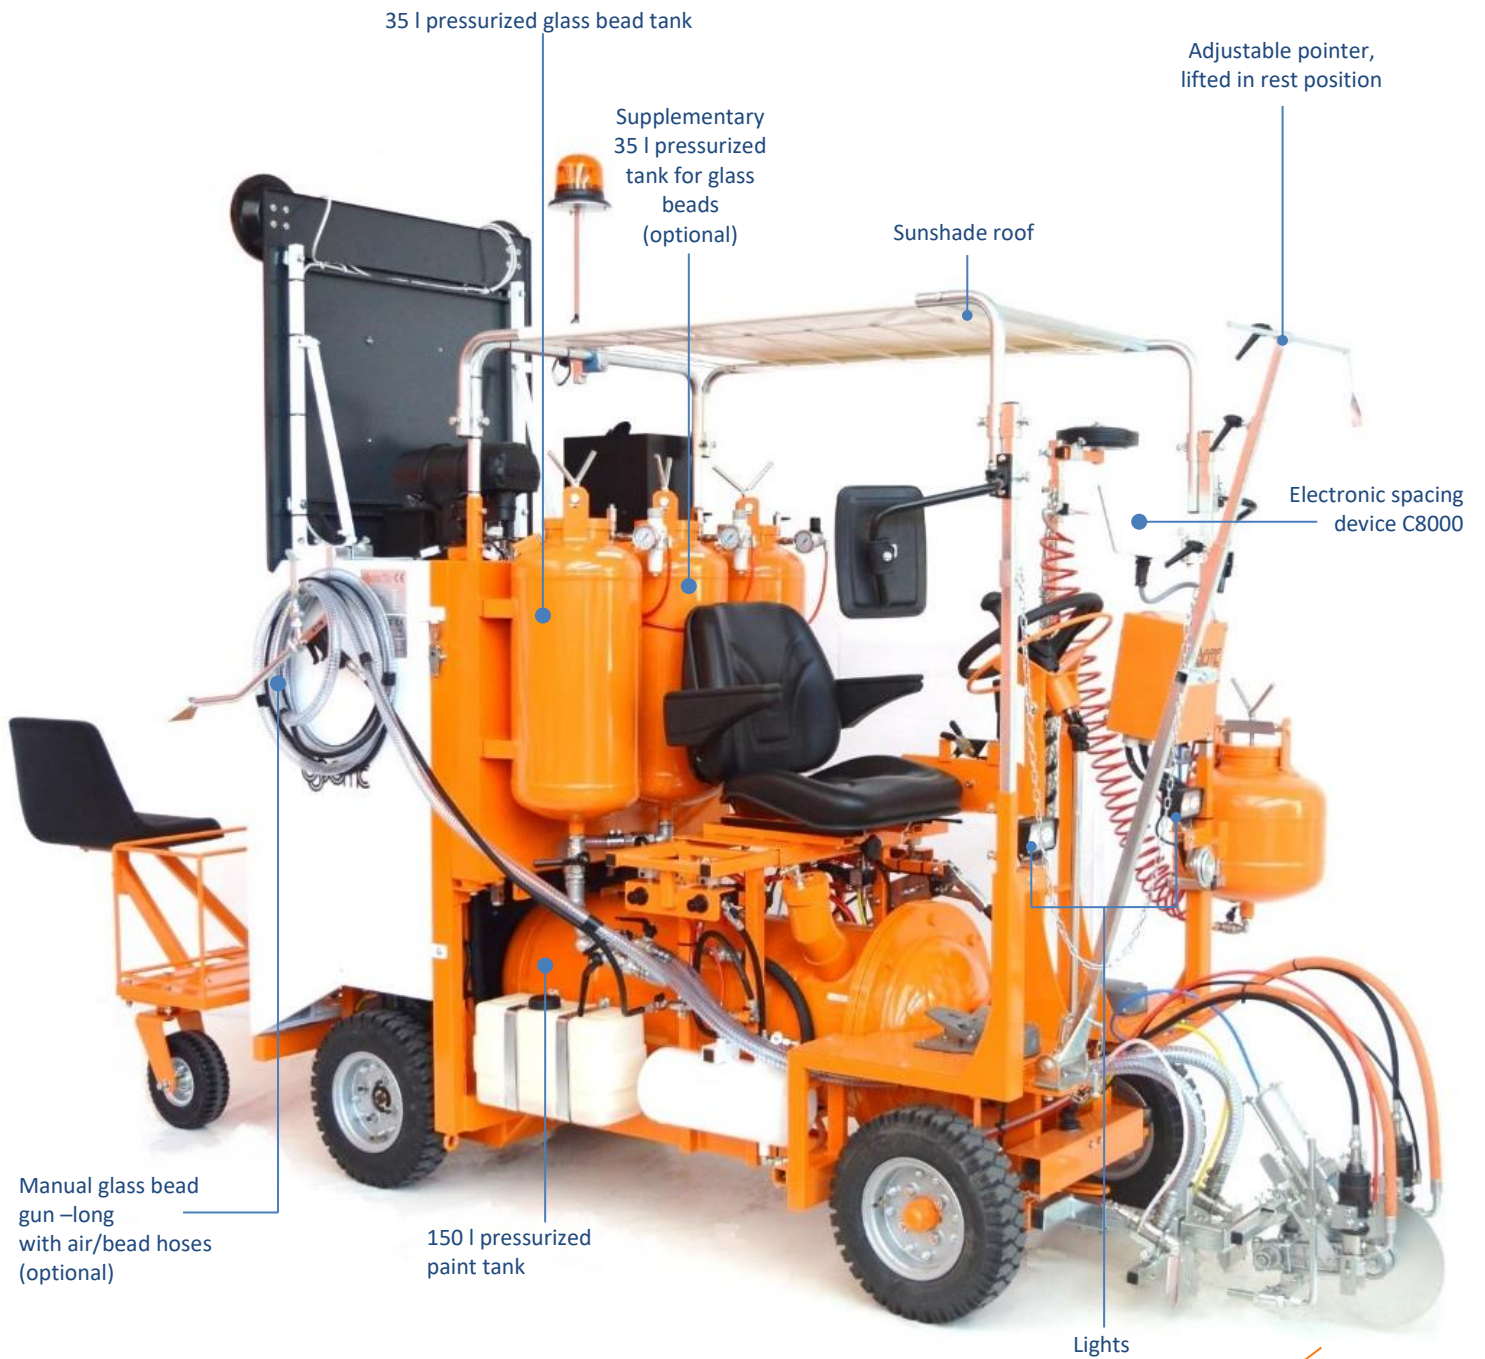

One-disc pneumatic support for paint gun (optional), mounted for central line

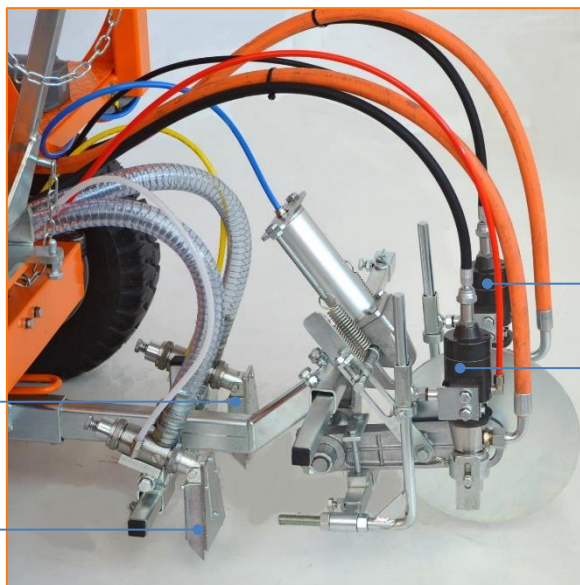

Automatic glass bead gun

Second automatic glass bead gun (optional)

Automatic paint gun

Second automatic paint gun (optional)



